
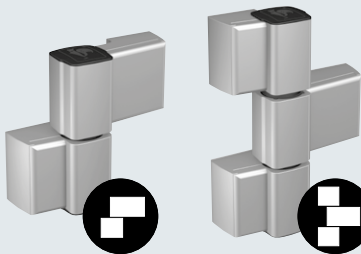


Hahn AT-G Serie 60 AT Türband 4 AT					
Application area For aluminium and steel profile sections Housing Public building	✓	✓	✓	✓	✓
Material Extruded aluminum profiles	✓	✓	✓	✓	✓
max. Weight capacity / resistance*	90 kg	140 kg	220 kg	180 kg	220 kg
Maintenance free	✓	✓	✓	✓	✓
Color options RAL-colors Anodised colours	✓ ✗	✓ ✓	✓ ✓	✓ ✓	✓ ✓
Fastening** Direct fastening Anchor screw Screw anchor Mounting plate For left hand and right hand doors	✓ ✗ ✗ ✗ ✓	✗ ✓ ✓ ✓ ✓	✗ ✓ ✓ ✓ ✓	✗ ✓ ✓ ✓ ✓	✗ ✓ ✓ ✓ ✓
Special versions Corner post construction Reversible profile Folding doors Intrusion-resistant doors	✗ ✗ ✗ ✗	✓ ✓ ✓ ✓	✓ ✓ ✓ ✓	✓ ✓ ✗ ✓	✓ ✓ ✗ ✓
Configurations and pivot points Flush-mount situations Upstand situations Pivot 20 mm Pivot 22 mm Pivot 36 mm Half measure 0 *** Half measure 5 ****	✓ 7 – 11 mm ✓ ✗ ✗ O O	✓ ✓ ✓ ✗ ✓ O ✓	✓ ✓ ✓ ✗ ✓ O ✓	✓ ✓ ✓ ✓ ✓ ✓ O	✓ ✓ ✓ ✓ ✓ ✓ O
Regulation In 6 directions without removing sash Horizontal regulation (continuously) Vertical regulation (continuously) Sealing compression regulation Opening angle	3 directions -3/+2 mm +3 mm ✗ maximum 180°	✓ ±2,5 mm +3/-2 mm ±0.5 mm > 180°	✓ ±2,5 mm +3/-2 mm ±0.5 mm > 180°	✓ ±2,5 mm +3/-2 mm ±0.5 mm maximum 180°	✓ ±2,5 mm +3/-2 mm ±0.5 mm maximum 180°
Certificates CE-Certification according to EN 1935:2002 SKG	✓ ✗/O	✓ 2 stars	✓ 2 stars	✓ 3 stars	✓ 3 stars

O = does not apply *Depending on profile section design

**Special variations not taken into account (wood aluminium, HM0 & HM5)

No screw anchor can be used *No anchor screw can be used